

Features

HOSE USA INC. HIGH TEMPERATURE FLEXES VENT GASES, RELIEVE EXHAUST SYSTEM COMPONENTS FROM FATIGUE AND VIBRATION, PREVENTING TRANSMISSION THROUGHOUT THE BUILDING, ACCOMMODATE MISALIGNMENT


A Stainless Steel Corrugated Hose

B Raised & Flat Face Plate Flanges

Custom Round or Square Flanges Available

All Assemblies Tested

Operating Temperature: Carbon Steel 850°F; Stainless St 1000°F *

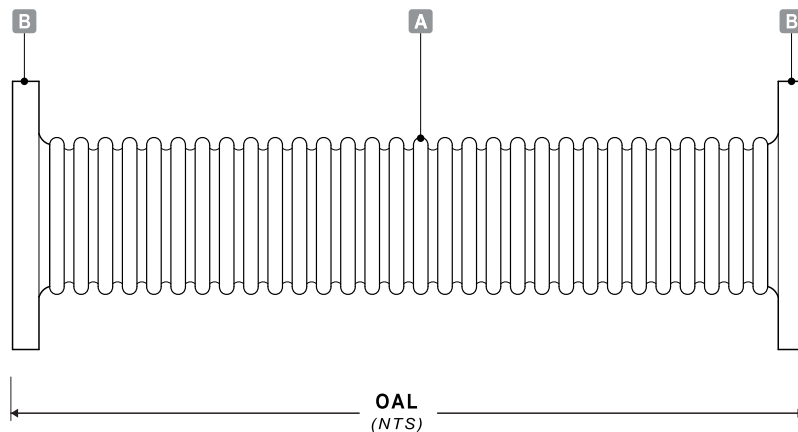

* WORKING PRESSURES DECREASE AS
OPERATING TEMPERATURES INCREASE

Ordering Information

TYPE	HOSE ASSEMBLY	PIPE SIZE	OVERALL LENGTH	FITTING END 1	FITTING END 2	FITTING ALLOY	SPECIAL REQUIREMENTS
HXJ	316 ANNULAR CORRUGATED SST HOSE	320 2" 400 2-½" 480 3" 640 4" 800 5" 960 6" 1280 8" 1600 10" 1920 12" 2240 14"	DECIMAL INCHES <i>ex. 30.625 for 2' - 6 ¾"</i>	1SF 150# DRILL FLAT FACE FLANGE 1RF 150# DRILL RAISED FACE FLANGE SEF SQUARE EXHAUST FLANGE		CS CARBON ST FS FORGED ST SS STAINLESS ST	INS INSULATED OHM HEAT SHRINK CVR

Customer: _____

PO Number: _____

Project: _____

Notes: _____

