

Features

HOSE USA INC. LNG & NATURAL GAS TRANSFER ASSEMBLIES ARE MANUFACTURED TO STRINGENT INDUSTRY SPECIFICATIONS. A PERMANENT IDENTIFICATION TAG IS AFFIXED TO EACH ASSEMBLY & TEST CERTIFICATIONS ARE INCLUDED WITH EVERY ORDER.


- A** 316 Stainless Steel Annular Corrugated Hose
- B** 304 Stainless Steel Braid / 1 or 2 Layers
- C** Schedule 80 Seamless SST Pipe Ends
- D** Brass LNG Coupling

Dye Pen Inspected Welds

Hose & Braid Burst Pressure 5:1 Safety Factor

Assemblies Hydrostatically Tested @ 1.5x Rated Wkg Pressure *

Manufactured by ASME Section IX Certified Welders

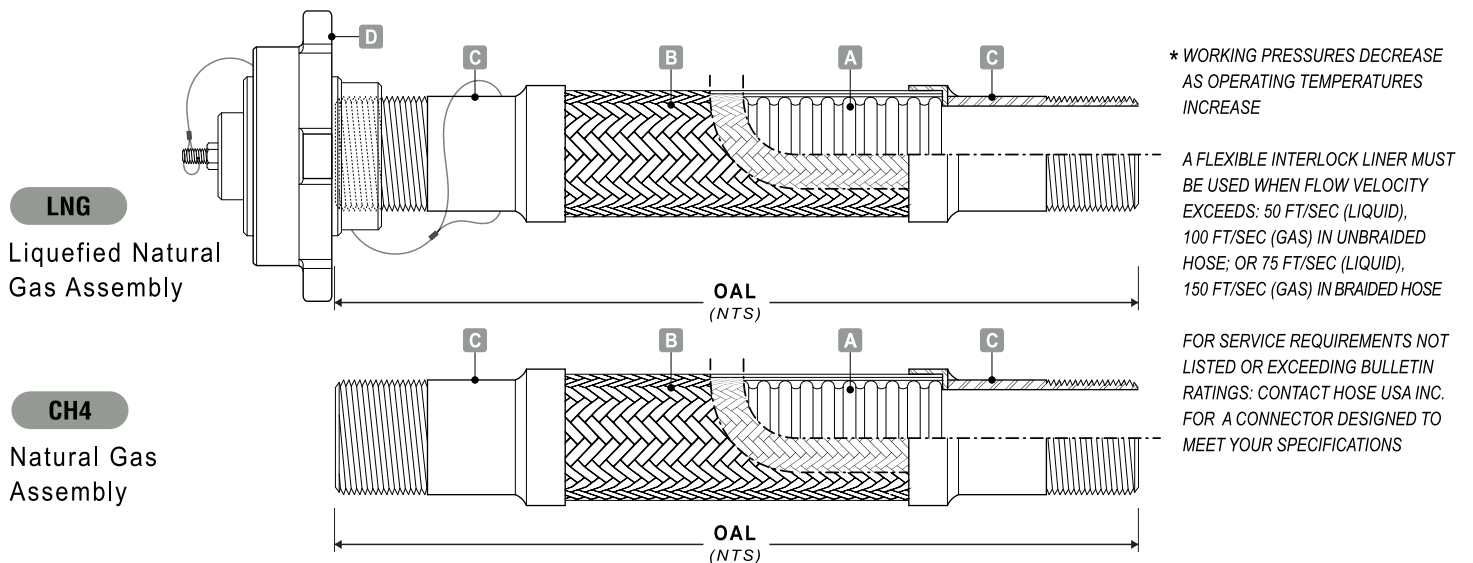


Fittings


F80
EXTRA HEAVY,
S80, SEAMLESS,
A106 FEMALE PIPE ENDS



M80
EXTRA HEAVY,
S80, SEAMLESS,
A106 MALE PIPE ENDS



HM8
EXTRA HEAVY,
S80, SEAMLESS,
A106 HEX MALE PIPE ENDS



Ordering Information

TYPE	HOSE ASSEMBLY	PIPE SIZE	OVERALL LENGTH	FITTING END 1	FITTING END 2	FITTING ALLOY	SPECIAL REQUIREMENTS
LNG	7161 700: 1 LAYER BRAID	080 1/2"	DECIMAL INCHES ex. 30.625 for 2' - 6 3/4"	F80 S80 FEMALE NPT		04 304L	AIS AIS COMPLIANT
CH4	7162 700: 2 LAYER BRAID	120 3/4"		M80 S80 MALE NPT		16 316L	016 316L HOSE/BRAID
		160 1"		HM8 S80 HEX MALE NPT		21 321L	021 321L HOSE/BRAID
		240 1-1/2"				CS CARBON ST	AGD ARMOR GUARD
		320 2"				FS FORGED ST	OHM HEAT SHRINK COVER
		400 2-1/2"					INS INSULATED
		480 3"					

Customer:

PO Number:

Project:

Notes:

